
Southwestern Industries, Inc. Site Preparation Guide TRAK DPMSX5


Before an Authorized Field Service Technician can perform the machine's final checkout, the following requirements must be met:

- The machine must be in position and placed on its rest pads
- To offload the machine, a 10000 lb. forklift with 6' extension is required.
- The machine must be leveled (refer to installation and service manual).
- The machine must be wired (refer to the installation and service manual).
- The machine must have air hooked up if power drawbar is installed (see the installation and service manual).
- The machine must be cleaned. Remove all grease from the way surfaces.

Space & Weight

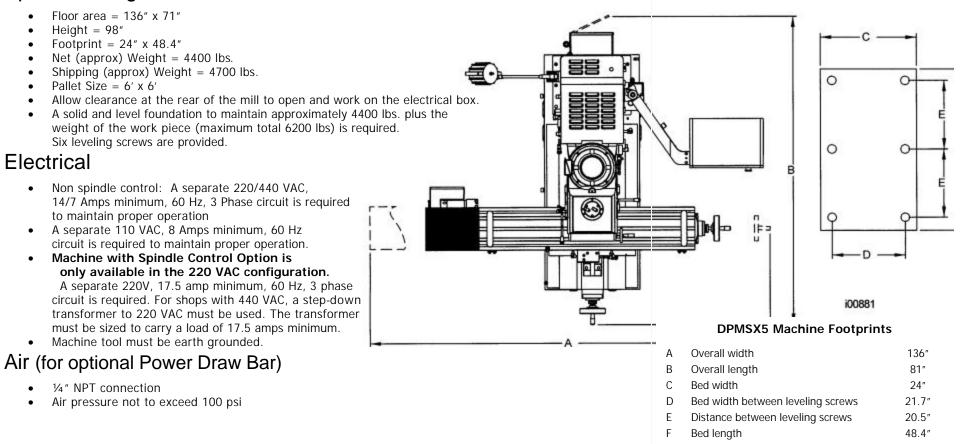

Southwestern Industries, Inc. Site Preparation Guide TRAK DPMSX5

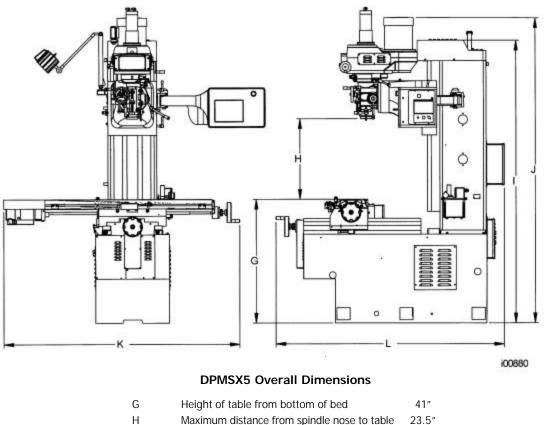

H Maximum distance from spindle nose to table 23.5[°]
I Height of machine from bottom of bed to top 87"

- of column cover J Maximum height of machine from bottom of 98"
- bed to top of spindle motor Width of machine including table tray 94"
- KWidth of machine including table tray94LLength of machine with electric box door7
- L Length of machine with electric box door 71" closed



Southwestern Industries, Inc.

2615 Homestead Place Rancho Dominguez, CA 90220-5610 USA T | 310.608.4422 | F | 310.764.2668 Service Department: 800.367.3165

e-mail: sales@southwesternindustries.com | service@southwesternindustries.com | web: southwesternindustries.com